

06-22-00

PATENT APPLICATION

ATTORNEY DOCKET NO. 10992107-1

A

IN THE U.S. PATENT AND TRADEMARK OFFICE
Patent Application Transmittal Letter

ASSISTANT COMMISSIONER FOR PATENTS
Washington, D.C. 20231

Sir:

Transmitted herewith for filing under 37 CFR 1.53(b) is a(n): (X) Utility () Design

(X) original patent application,
() continuation-in-part application

JC490 U.S. PTO
09/597960
06/20/00

INVENTOR(S): D. Amnon Silverstein

TITLE: Collapsible Computer Mouse

Enclosed are:

(X) The Declaration and Power of Attorney. (X) signed () unsigned or partially signed
(X) 4 sheets of drawings (one set) () Associate Power of Attorney
() Form PTO-1449 (X) Information Disclosure Statement and Form PTO-1449
() Priority document(s) () (Other) (fee \$)

CLAIMS AS FILED BY OTHER THAN A SMALL ENTITY				
(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) TOTALS
TOTAL CLAIMS	20 — 20	0	X \$18	\$ 0
INDEPENDENT CLAIMS	3 — 3	0	X \$78	\$ 0
ANY MULTIPLE DEPENDENT CLAIMS	0		\$260	\$ 0
BASIC FEE: Design \$310.00); Utility \$690.00)				\$ 690
TOTAL FILING FEE				\$ 690
OTHER FEES				\$
TOTAL CHARGES TO DEPOSIT ACCOUNT				\$ 690

Charge \$ 690 to Deposit Account 08-2025. At any time during the pendency of this application, please charge any fees required or credit any over payment to Deposit Account 08-2025 pursuant to 37 CFR 1.25. Additionally please charge any fees to Deposit Account 08-2025 under 37 CFR 1.16, 1.17, 1.19, 1.20 and 1.21. A duplicate copy of this sheet is enclosed.

"Express Mail" label no. EL 519584280 US
Date of Deposit June 20, 2000

I hereby certify that this is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to: Assistant Commissioner for Patents, Washington, D.C. 20231.

By Dee Timmons
Typed Name: Dee Timmons

Respectfully submitted,

D. Amnon Silverstein

By James W. Maccoun
James W. Maccoun

Attorney/Agent for Applicant(s)
Reg. No. 35,592

Date: June 20, 2000

Telephone No.: (650) 857-3475

COLLAPSIBLE COMPUTER MOUSE

BACKGROUND OF THE INVENTION

5 The present invention relates generally to computer input/output devices. More specifically, the present invention relates to a computer mouse.

A computer mouse is a popular pointing device for desktop computers. The computer mouse is convenient to grasp, simple to move and easy to operate. With the flick of a wrist and the click of a button, an application can
10 be launched, a function can be selected, text can be deleted or a line can be drawn.

While the computer mouse is a popular pointing device for desktop computers, it is not a popular pointing device for laptops and other portable computers. A typical computer mouse is relatively large and inconvenient to
15 store and transport.

Instead, mobile computers are equipped with pointing devices such as track balls, track pads, and pointing sticks. Small in size, a track ball is easier to store and transport than a conventional mouse. Track pads and pointing sticks are usually integrated into notebook computers and, therefore, do not
20 have to be stored.

Still, track balls, track pads and pointing sticks can be awkward to use. Certain applications such as drafting programs require precise and rapid movements of the pointing device. A mouse can deliver precise movements much more easily and much more rapidly than a pointing stick.
25

Reduced-size mice have been proposed for mobile computers. However, reducing the size of the mouse increases the difficulty in handling and controlling the mouse.

There is a need for a computer mouse that is convenient to handle and control, yet convenient to store and transport.
30

SUMMARY OF THE INVENTION

This need is met by the present invention. According to one aspect of the present invention, a collapsible computer mouse includes a collapsible housing. The collapsible mouse is as easy to handle and control as a
5 conventional mouse. When the housing is collapsed, however, the collapsible mouse may be conveniently stored and transported. For example, the mouse may be collapsed and stored in a PCMCIA slot of a mobile computer.

Other aspects and advantages of the present invention will become
10 apparent from the following detailed description, taken in conjunction with the accompanying drawings, illustrating by way of example the principles of the present invention.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is an illustration of a notebook computer and a first collapsible
15 mouse;

Figure 2 is an illustration of the first collapsible mouse being stored in a first PCMCIA slot of the computer and a PCMCIA card located in a second PCMCIA slot of the computer;

Figure 3 is an illustration of an upper housing portion of the first
20 collapsible mouse;

Figures 4A, 4B and 4C are illustrations of a second collapsible mouse;

Figure 5 is an illustration of the second collapsible mouse being stored in a first PCMCIA slot of a computer and a PCMCIA card located in a second
25 PCMCIA slot;

Figures 6A and 6B are illustrations of an optical sensor in deployed and stowed positions; and

Figures 7A and 7B are illustrations of an optical sensor in deployed and stowed positions.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

As shown in the drawings for purposes of illustration, the present invention is embodied in a computer mouse having a collapsible housing. When the housing is collapsed, the collapsible mouse may be conveniently
5 stored and transported. For example, the collapsed mouse may be stored in a PCMCIA slot of a mobile computer. During normal usage, when the housing is not collapsed, the collapsible mouse is as large as a conventional mouse. Therefore, the collapsible mouse is as easy to handle and control as a conventional mouse. It is easier to handle and control than small, finger-
10 driven pointing devices.

Figure 1 shows a notebook computer 102 and a collapsible mouse 104 for the notebook computer 102. The collapsible mouse 104 includes a collapsible housing 106 having a base 106a and an upper portion 106b that is secured to the base 106a. For example, the upper portion 106b may have a
15 convex shape and may be attached to periphery of the base 106a. When not collapsed, the housing 106 may have the size and shape of a conventional mouse.

The base 106a may be made of a hard, relatively rigid plastic. An outer surface 106c of the base 106a may be coated with a material that
20 allows sliding along a slidable surface (e.g., a mouse pad, a desk top). For example, the outer surface 106c of the base 106a may be covered with "TEFLON" tape.

An optical sensor 108 is located within the housing 106. The optical sensor 108 includes an LED lamp, a lens and a sensor chip. The sensor
25 chip, which may be an Application-Specific Integrated Circuit ("ASIC"), includes an embedded optical detector and an embedded processor. The lens covers a window in the base 106a. The sensor chip may be secured to the base 106a, with the detector being in alignment with the lens. The base 106a should be relatively rigid to maintain proper alignment between the lens and the detector. During operation, the LED lamp illuminates a portion of the
30

slidable surface and the lens images the illuminated portion onto the detector.

The detector detects a series of images (which should change as the mouse is moved), and the processor examines changes in the light patterns to determine a relative motion of the mouse 104. The processor generates a
5 signal indicating the relative motion, the signal being in a mouse port format.

The upper portion 106b of the housing 106 may be made of foam, hollow rubber, or other elastic material that can be compressed. A user may compress or collapse the mouse 104 by applying a downward force on the housing 106. The mouse 104 may be flattened and stored in briefcase or
10 computer case, or the collapsed mouse 104 may be stored in a small compartment. The base 106a, optical sensor 108 and upper housing portion 106b may be made thin enough for the compressed mouse 104 to be squeezed inside a type I PCMCIA slot 103 of the notebook computer 102 (see Figure 2).

15 When the mouse 104 is removed from storage, the elastic material returns to its original shape, whereby the housing 106 returns to its original shape. Thus, the mouse 104 may return to the size of a conventional mouse after compressive forces have been removed.

The hollow rubber or foam composition of the upper housing portion
20 106b makes the mouse 104 easy to grip. Thus, the collapsible mouse 104 can be as easy to handle and control as a conventional mouse.

The upper housing portion 106b includes one or more "buttons." The buttons may be implemented in different ways. For example, outlines 110 of buttons may be drawn or silk-screened onto the upper housing portion 106b,
25 and a sensor 112 may be embedded in the upper housing portion 106b, beneath each outlined area 108 (see Figure 3). An output of each sensor 112 is supplied to the processor of the optical sensor 108. Pressing on an outlined area causes a deflection of the outlined area 114. The sensor 112 beneath the deflected area is sensitive enough to detect the deflection before
30 the housing 106 is collapsed. When the deflection exceeds a threshold, the

processor indicates (to the host) that a button has been clicked.

In the alternative, a one-button mouse may be implemented by placing a pressure sensor within the housing 106. When the upper housing portion 106b is "squeezed", the pressure sensor detects a change in air pressure
5 within the housing 106. An output of the pressure sensor is supplied to the processor. When the pressure change exceeds a threshold, the processor indicates (to the host) that the button has been clicked. The pressure sensor may be fabricated on the sensor chip.

The mouse 104 may be connected to the computer via a cable 116
10 and PCMCIA card 118. The cable 116 may extend through an opening in the housing 106. A first end of the cable is connected to the sensor chip, and a second (other) end of the cable is adapted to be connected to the PCMCIA card 118. For example, the second end of the cable 116 may terminate into a flat connector 120 that can mate with a connector in the PCMCIA card 118.

15 The mouse 104 may also have a retractable cable assembly for retracting the cable 114 into the housing 106. The retractable cable assembly may include a spring-loaded reel 122 that is mounted to the base 106a. When the cable 116 is disconnected from the PCMCIA card 118, the reel 122 pulls the cable 116 into the housing 106. The housing opening may be sized
20 and shaped such that the connector 120 nestles into the opening when the cable 116 is fully retracted into the housing 106. A lock or catch prevents the reel 122 from retracting the cable 114 while the mouse 104 is being used.

Figures 4A to 4C show a second collapsible mouse 204 having a collapsible housing 206. The housing 206 includes an upper portion 208, a
25 base 210 and sidewalls 212 between the upper portion 208 and the base 210. The base 210 may have a rectangular in shape that fits into a PCMCIA slot of a computer. The upper housing portion 208 may also be generally rectangular in shape. The sidewalls 212 may give the housing 206 a box-like shape, or the sidewalls 212 may be tapered so the upper portion 208 can join
30 the base 210 at the front of the housing 206 and thereby give the housing 206

more of a sleek shape.

Each side wall 212 has a fold line 214. When a downward force is applied to the upper portion 208 (as indicated by the arrow A), the sidewalls 212 fold inwardly at their fold lines 214, whereby the housing 206 collapses
5 into a relatively flat structure (see Figure 4c). The housing 206 returns to its original shape when the applied force is removed.

The housing 206 of the second mouse 204 may be formed from a single sheet of a relatively stiff resilient sheet plastic material. In the alternative, the housing 206 may be formed from multiple plates.

10 An optical sensor 218 is located within the housing 206. A lens of the optical sensor covers a window in the base 210. The base 210 should be relatively rigid to keep the lens and detector in alignment.

A pair of soft strips 216 are cantilevered from the upper housing portion 208. These strips 216 function as buttons. A small sensor (not
15 shown) is provided for each button. Each sensor may detect the amount of bend in its corresponding strip 216. An output of each sensor is supplied to the processor of the sensor chip. The amount of bend indicates whether a button has been actuated.

The second mouse 204 may communicate with a host (e.g., a
20 notebook computer) using wireless techniques. A wireless transmitter may be used to transmit mouse information to a host. The transmitter may be powered by a flat battery. The transmitter may be included in the sensor chip of the optical sensor 218.

If the host has an infrared ("IR") receiver, the transmitter may be an IR
25 transmitter that transmits data according to a well known IrDA specification.

The transmitter may instead be a radio frequency ("RF") transmitter that transmits data according to a standard such as the Bluetooth RF specification. A PCMCIA card may include an RF receiver for receiving the transmitted mouse data. Thus, the RF transmitter would communicate with a
30 host via the PCMCIA card.

Reference is now made to Figure 5, which shows the PCMCIA card 220 in a first slot 222a of a notebook computer. Figure 5 also shows the second mouse 202 collapsed and stored in a second slots 222b.

The second mouse 204 may have a PCMCIA connector 224 that can
5 mate with a connector in the PCMCIA slot 222a. PCMCIA slot connectors are usually powered by the battery of the host 202. Thus, the mouse battery can be charged by the host battery while the mouse 202 is being stored in the PCMCIA slot.

In the alternative, the second mouse 204 may plug in directly to the
10 PCMCIA card 220. Circuitry for charging the mouse is included in the mouse 204 or the PCMCIA card 220.

The PCMCIA card 220 may be full-sized or half-sized. However, a half-sized PCMCIA card 220 allows more room for the mouse to be stored.

Thus disclosed is a collapsible mouse that is convenient to store and
15 transport, yet as easy to handle and control as a conventional mouse. The collapsible mouse is easier to handle and control than small, finger-driven pointing devices that are commonly used in mobile computers.

The collapsible mouse is not limited to use with notebooks and other mobile computers. The collapsible mouse may be used as a pointing device
20 for desktop computers and any other type of computer systems.

Certain features of the first mouse may be used by the second mouse, and vice versa. For example, the first mouse may include a transmitter and battery instead of a retractable cable.

The flat connector may be connected to the PCMCIA card, or it may be
25 connected to a port of the computer. Such a computer port may have a proprietary format.

The cable connector is not limited to the low-profile connector described above. It may instead be a standard connector such as a PS/2 connector, a serial connector or a Universal Serial Bus ("USB") connector.
30 The standard connector would connect directly to a computer port (e.g., a

PS/2 port, a serial port or a USB port).

Instead of using a retractable cable, a cable that plugs into the mouse may be used. For example, a USB cable may be plugged into the collapsible mouse. In such an instance, the mouse would be provided with a connector

5 port.

Referring to Figures 6A and 6B, the profile of the optical sensor 108 may be reduced when the housing 106 is collapsed. The profile of the optical sensor 108 may be reduced by moving the sensor chip 108a between a deployed position and a stowed position. In the deployed position (Figure 6A), the detector of the sensor chip 108a is aligned with the lens 108b. In the stowed position (Figure 6B), the sensor chip 108a rests on the housing base 106a. The lens 108b and lamp 108c remain in fixed positions. Hinges 108d may be used to move the sensor chip 108a between the deployed and stowed positions. The hinges 108d may be spring-biased towards the deployed position. However, the same force that collapses the housing 106 also moves the sensor chip 108a towards the stowed position.

Figures 7A and 7B show an alternative approach to reducing the profile of the optical sensor 108. The sensor chip 108a may be moved up a ramp 108e to the deployed position (Figure 7A) and down the ramp 108e to the stowed position (Figure 7B).

The collapsible mouse is not limited to optical sensors. The collapsible mouse may use any other motion sensor having a low profile.

The invention is not limited to the specific embodiments described above. Instead, the invention is construed according to the claims that follow.

25

WHAT IS CLAIMED IS:

1. A computer mouse comprising:
a motion sensor; and
a collapsible housing for the motion sensor.
2. The mouse of claim 1, wherein the housing is collapsible into a relatively flat structure.
3. The mouse of claim 1, wherein the motion sensor includes an optical sensor.
4. The mouse of claim 1, wherein the collapsible housing includes a base and an upper portion attached to the base, the base being rigid, the upper portion being made of a collapsible material.
5. The mouse of claim 4, wherein the collapsible material is an elastic material.
6. The mouse of claim 1, wherein the collapsible housing includes a resilient sheet plastic having fold lines that allow the housing to collapse into a relatively flat structure.
7. The mouse of claim 6, wherein the resilient plastic sheet includes a top portion, a base and inwardly-collapsible sidewalls between the top portion and the base, the sidewalls having the fold lines.
8. The mouse of claim 1, wherein the mouse is sized to fit within a type I PCMCIA slot when the housing is fully collapsed.

9. The mouse of claim 1, further comprising a retractable cable assembly within the housing.
10. The mouse of claim 1, further comprising a transmitter within the housing.
11. The mouse of claim 1, further comprising a PCMCIA connector mounted to the housing.
12. The mouse of claim 1, wherein the housing has a deflectable mouse button area; and wherein the mouse further comprises at least one sensor for detecting when the area is deflected; whereby deflecting the area corresponds to clicking a mouse button.
13. The mouse of claim 1, further comprising a sensor within the housing, the sensor detecting housing volume changes that correspond to mouse clicks.
14. The mouse of claim 1, further comprising a bendable strip cantilevered from the housing; and a sensor for detecting when the strip is bent; whereby bending the strip corresponds to clicking a mouse button.
15. The mouse of claim 1, wherein the motion sensor includes a sensor chip that is movable between a stowed position and a deployed position.
16. A combination comprising
a mouse including a collapsible housing; and
a PCMCIA card for communicating with the mouse.

17. The combination of claim 16, further comprising a flat battery within the housing and a battery charger within one of the mouse and the PCMCIA card.




18. A housing for a computer mouse, the housing comprising:
a base; and
a collapsible upper portion secured to the base.

19. The housing of claim 18, wherein the base is rigid and the collapsible upper portion is made of an elastic material.

20. The housing of claim 18, wherein the base and upper portion include a resilient sheet plastic having fold lines that allow the housing to collapse into a relatively flat structure.

ABSTRACT

- 12 -

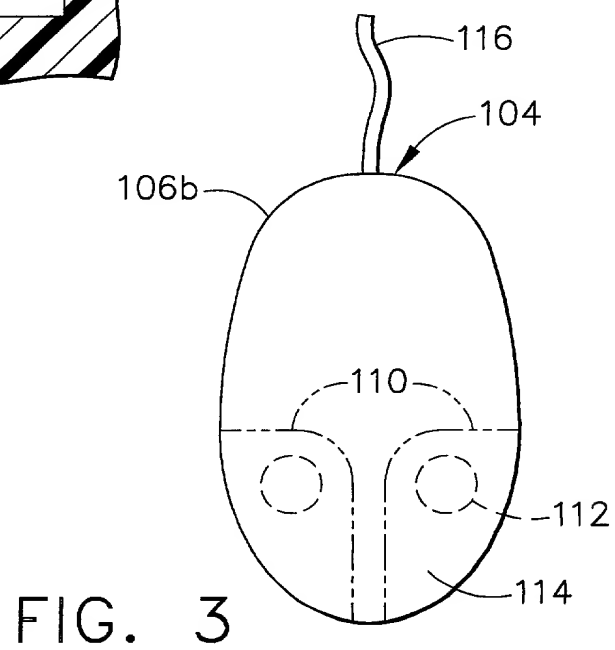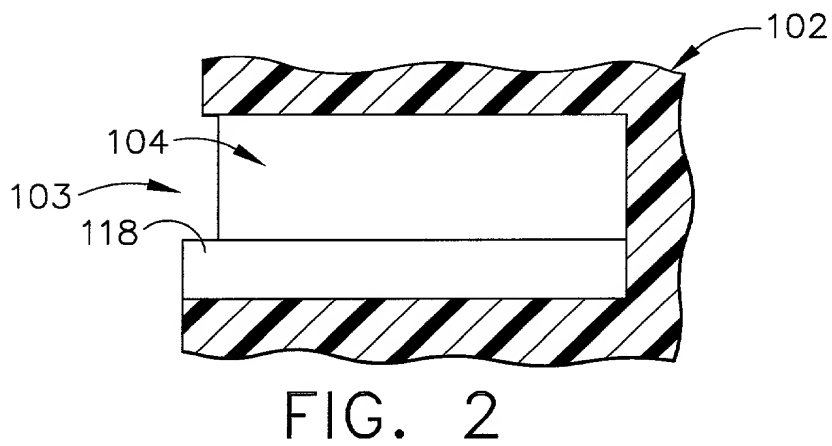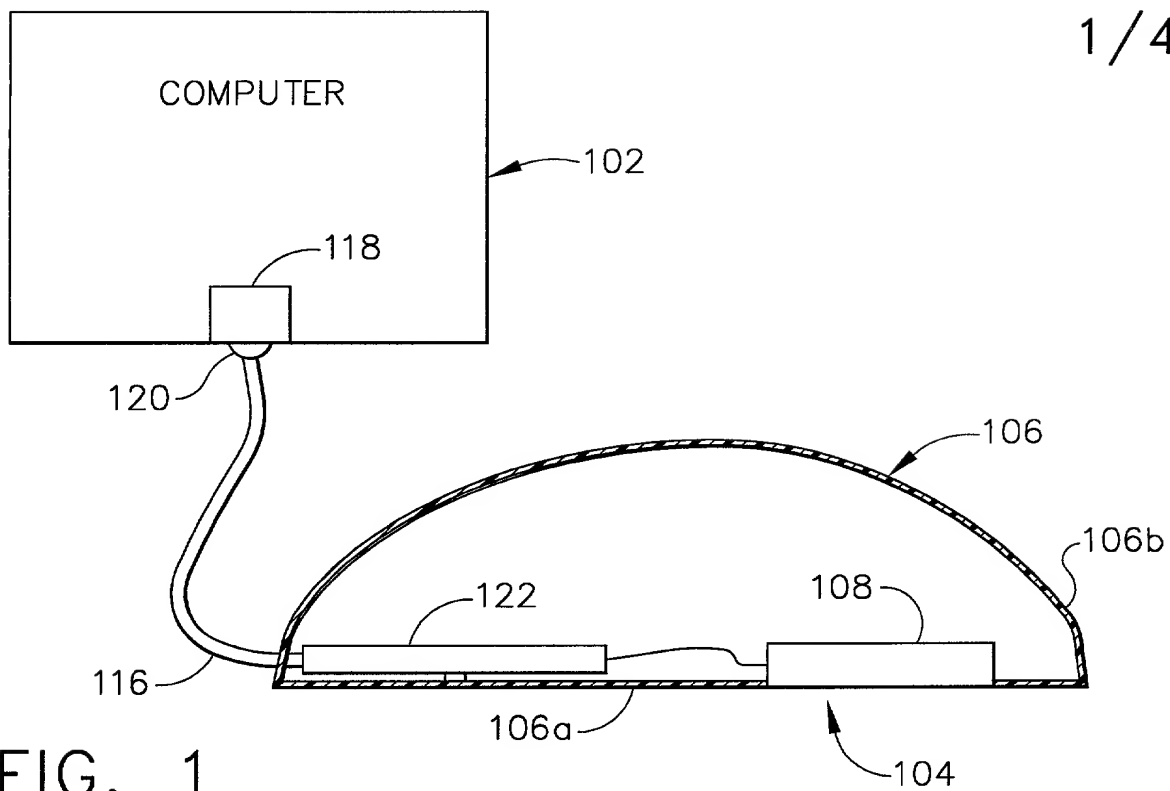

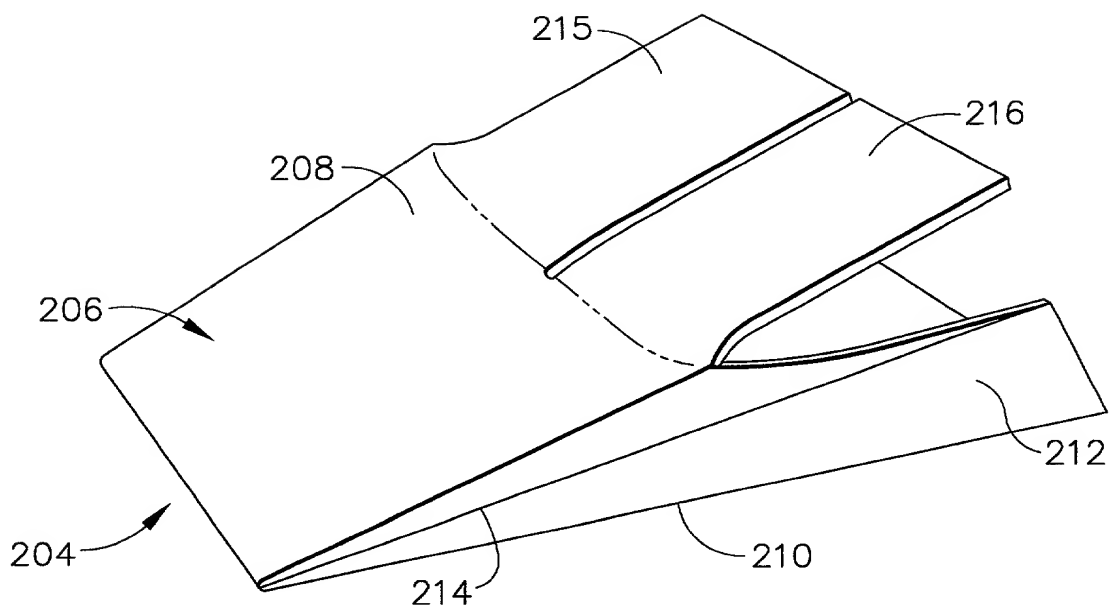


FIG. 4A

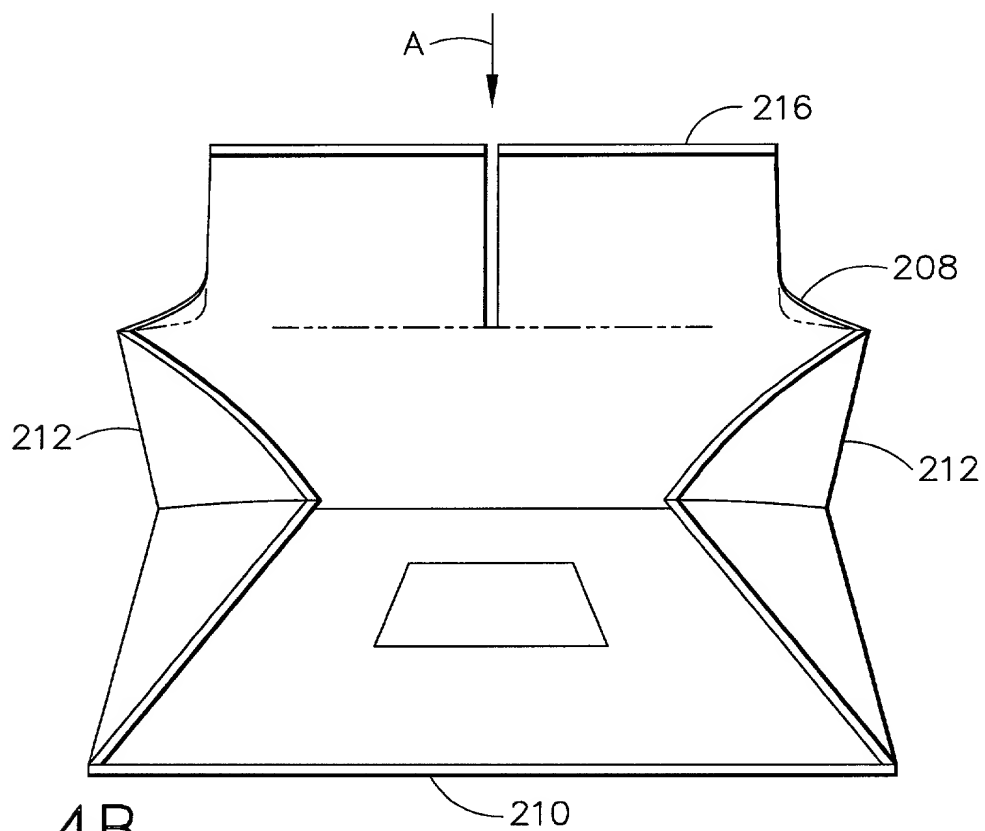


FIG. 4B

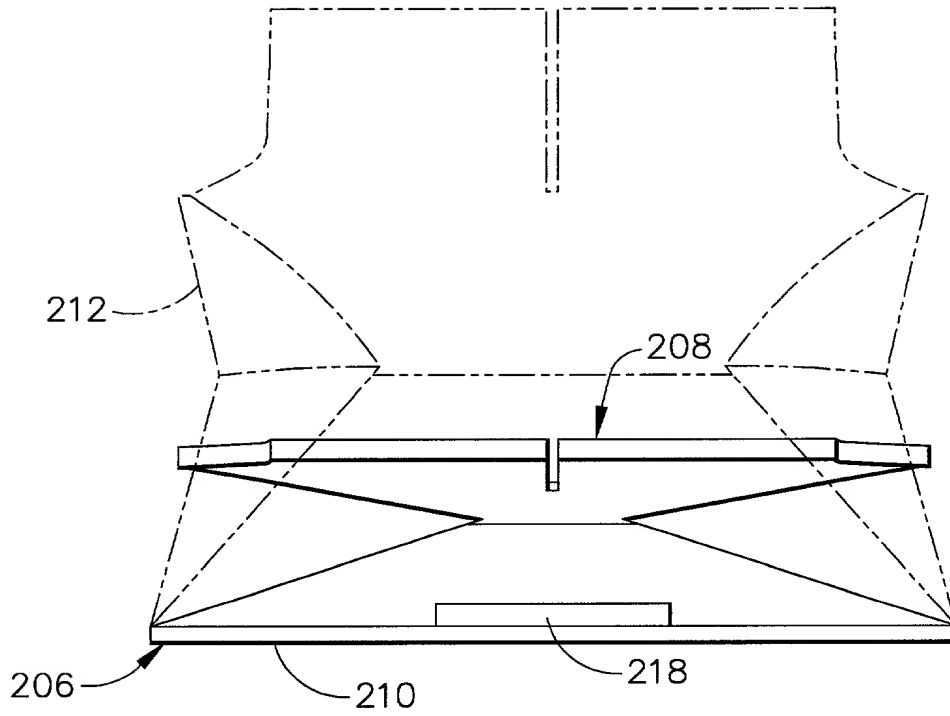


FIG. 4C

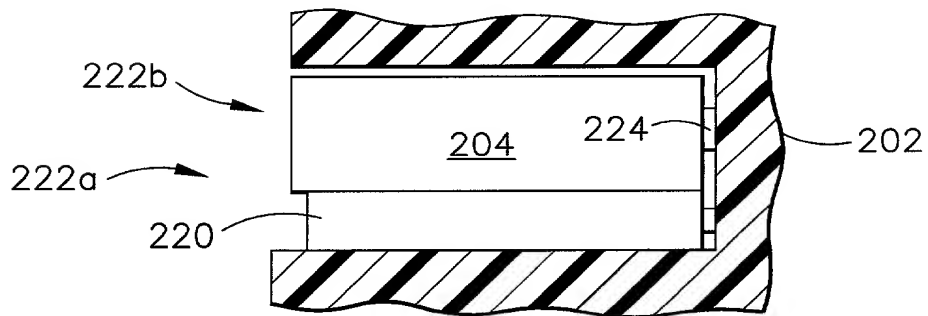


FIG. 5

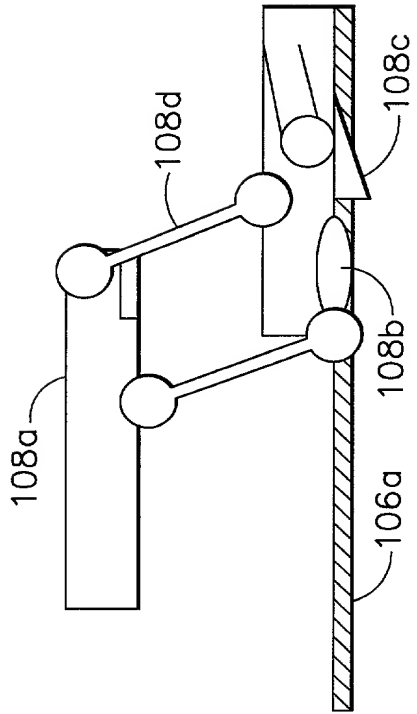


FIG. 6A

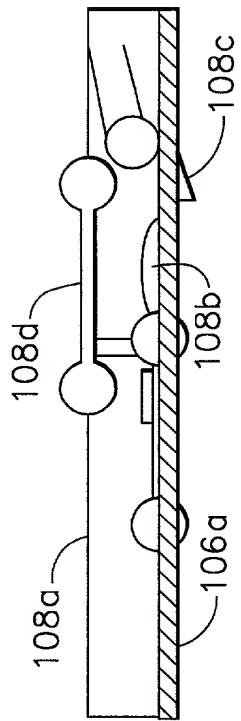


FIG. 6B

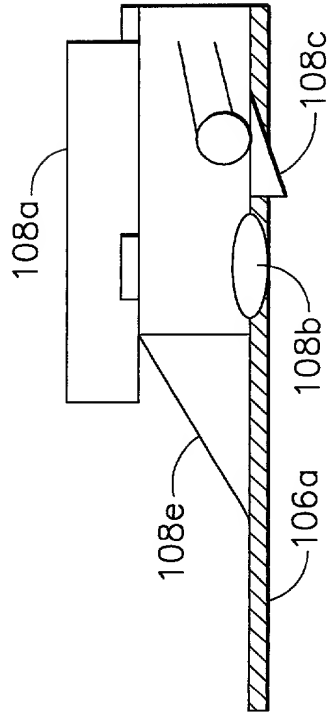


FIG. 7A

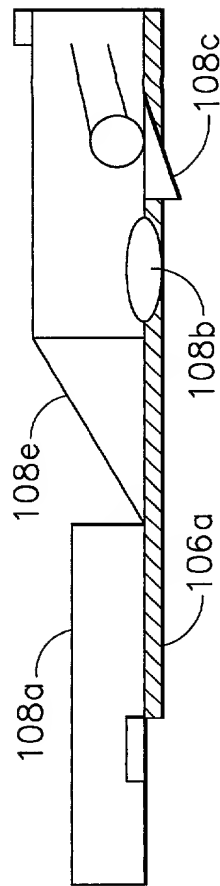


FIG. 7B

DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATIONATTORNEY DOCKET NO. 10992107-1

As a below named inventor, I hereby declare that:

My residence/post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

Collapsible Computer Mouse

the specification of which is attached hereto unless the following box is checked:

() was filed on _____ as US Application Serial No. or PCT International Application Number _____ and was amended on _____ (if applicable).

I hereby state that I have reviewed and understood the contents of the above-identified specification, including the claims, as amended by any amendment(s) referred to above. I acknowledge the duty to disclose all information which is material to patentability as defined in 37 CFR 1.56.

Foreign Application(s) and/or Claim of Foreign Priority

I hereby claim foreign priority benefits under Title 35, United States Code Section 119 of any foreign application(s) for patent or inventor(s) certificate listed below and have also identified below any foreign application for patent or inventor(s) certificate having a filing date before that of the application on which priority is claimed:

COUNTRY	APPLICATION NUMBER	DATE FILED	PRIORITY CLAIMED UNDER 35 U.S.C. 119
N/A			YES: _____ NO: _____
			YES: _____ NO: _____

Provisional Application

I hereby claim the benefit under Title 35, United States Code Section 119(e) of any United States provisional application(s) listed below:

APPLICATION SERIAL NUMBER	FILING DATE
N/A	

U. S. Priority Claim

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, Section 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

APPLICATION SERIAL NUMBER	FILING DATE	STATUS (patented/pending/abandoned)
N/A		

POWER OF ATTORNEY:

As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith:

Customer Number **022879**Place Customer
Number Bar Code
Label hereSend Correspondence to:
HEWLETT-PACKARD COMPANY
Intellectual Property Administration
P.O. Box 272400
Fort Collins, Colorado 80528-9599**Direct Telephone Calls To:**James W. Maccoun
(650) 857-3475

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Inventor: D. Amnon Silverstein Citizenship: USResidence: 1832 Anamor Street, Redwood City, CA 94061Post Office Address: Same as Residence

Inventor's Signature

Date

6/19/2000